

Cash drawer

Content

Cash drawer	1	Coin compartment	8
Manual	1	Metal clip for notes	4
Keys	2	Screws	4

Description

Adjustable bill and coin dividers and removable interior drawer.

The drawer works with printers equipped with RJ11 interface (two physical exits : top and bottom).

3 locking positions.

Cable management: cables neatly stored in the drawer.

Unique key per drawer.

Security modes: fully locked, only electronically or with the key to open.

Opening along the front (with recessed slot) of the drawer.


Dimensions (mm): 335 (width) x 366 (depth) x 100 (height).

Metal thickness: 2 mm (ultra stable).

Electronic specification (input to solenoid):

<i>Pulse amplitude</i>	<i>12-24 VDC</i>	<i>Maximum input voltage</i>	<i>26.5 VDC</i>
<i>Pulse width</i>	<i>100-200 msec</i>	<i>Consumption</i>	<i>1A @ 24 VDC</i>
<i>Pulse cycle</i>	<i>10% max</i>	<i>Activation</i>	<i>0,9 A max</i>

Locking operation

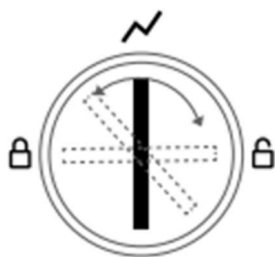

Permanent locking




Open with key




Automatic opening via printer

Installation


In addition to a classic (detached) placement on or under the counter, the drawer is designed to perfectly integrate a cash register. The cables from the cash register (and from the printer) can then pass through the drawer. To facilitate installation, temporarily remove the inner tray. Some examples of configurations :

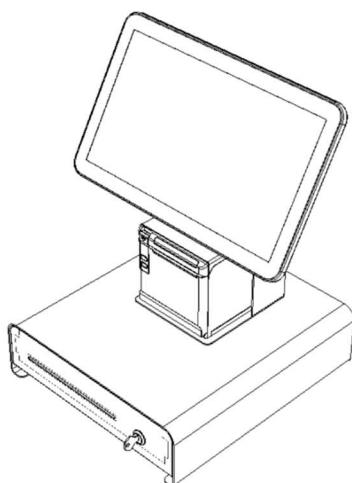

VESA screen and printer

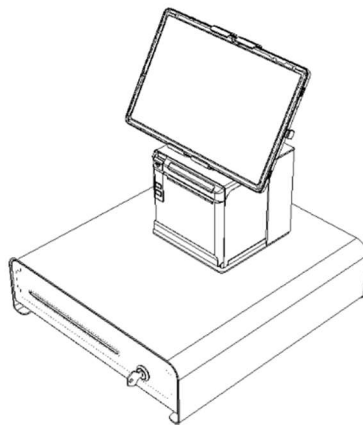

- Tablet and printer

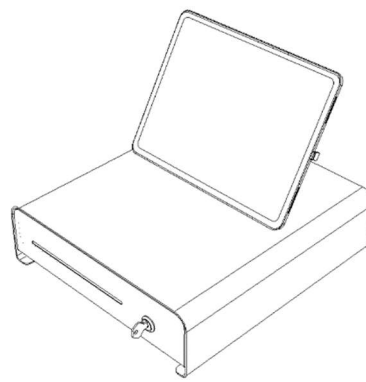

Tablet

Visit the website for more information (scan the QR code).

DRAWER



Scan me

boxapos®