



## PLUS2

### Panel printer

- High print quality (200 DPI)
- Same mechanics as PlusII (100% compatible)
- Paper width: 58mm
- Paper weight: 55-70gr/mq
- Paper roll dimension Ø 50mm
- Power supply: 4-7.5Vdc (9-48 Vdc with optional board)
- 4MB internal flash memory for logos and fonts
- Interfaces: RS232/TTL (selectable with lever switch), mini USB
- Barcodes: 1D and 2D (QRCODE)
- International fonts on-board: any language available
- Sensors: head temperature, paper presence, cover open (optional)
- UL, CE, FCC approved
- The ideal solution for tough environments: from -20 up to +70 degrees


## CHARACTERISTICS

- **Energy-efficient** functionality to reduce consumption
- RGB status LED
- FEED button
- ECO MODE

## APPLICATIONS:

- Workshop equipment
- Medical equipment
- PC panel and control systems
- Weighing instruments: industrial, portable
- Fire detection systems
- Sterilization equipment
- Taximeters
- Truck tachographs
- Access control
- Measurement devices: durometers, electrical devices, etc...

## SOFTWARE:

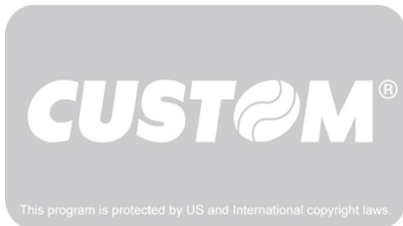

**CePrinterSet SOFTWARE** : to update logos, edit characters, set operating parameters and update the printer firmware. It allows you to create a file including the different SW customizations and send them to the printer via the interface provided, for easy and fast setting

- Print drivers for Win XP/Vista/7 (+64bit support) / 8 / CE 6.0
- Linux Driver (C.U.P.S.) 32/64 bit compatible



With only one model of printer you can print on "linerless" adhesive paper or standard thermal paper, allowing to meet different needs and applications.

## AVAILABLE VERSIONS:

- RS232/TTL and mini USB
- Mechanical version (without electronic board)

## ACCESSORIES

- Real Time Clock
- Extended range module (9-48 Vdc)

---

## TECHNICAL SHEET

<b>Printing Method</b>	Thermal
Number of dots	8 dots/mm
Columns	24, 32, 40, 42
Resolution	203 DPI
Printing (mm/sec)	max 50mm/sec (in absence of energy-efficient functionality)
Character set	European, International, Portuguese and Nordic, Chinese (GB18030), Katakana, Arabic, Greek, Turkish, Hebrew, and Cyrillic
Supported Barcode	1D and 2D (QR CODE)
Paper width	58 mm
Paper weight	from 55 to 70 g/m <sup>2</sup>
Roll Dimension	Ø 50mm
Sensors	Head temperature, paper presence, cover open (optional)
Emulation	Escape Command Compatibility, PlusII compatibility
Interfaces	RS232/TTL, mini USB
Data Buffer	16Kb
Flash Memory	4MB (+768 Kb internal)
RAM Memory	128Kb internal + 8MB external
Graphic Memory	4MB internal flash memory for logos and fonts
Drivers	Linux Win: XP, Vista (32/64bit), 7 (32/64bit), 8 (32/64bit) CE 6.0 Android iOS
Software Tools	CePrinterSet
Power supply	4-7.5 Vdc (9-48 Vdc with optional board)
Operating temperature	-20 a +70
Marks	UL, CE, FCC
Dimensions	56.9 (L) x 85 (H) x 85 (W) mm
Weight	145gr

## MODELS



**915CW180100322**

PRINTER 57MM PLUS2 USB RS232  
TTL



**915CW180165333**

PRINTER 57MM PLUS2 USB RS232  
TTL MOV

---

CUSTOM SPA - Via Berettine, 2 - 43010 Fontevivo PR - VAT: IT02498250345 - TEL: +39 0521 680111 - FAX: +39 0521 610701 - UNIQUE CODE: T180WI0

The technical data on this website are not binding and may be changed without advanced notice.  
Last update: 05 December 2019