## DNP Technical Data Sheet


### **Resin-Enhanced Wax**

### **Product Description**

TR4085plus<sup>®</sup>

- High print sensitivity saving energy and allowing for a longer print head lifecycle
- High edge definition allowing for sharp, readable barcodes
- Excellent smudge and scratch resistance
- High speed printability
- ► Ability to print on a wide range of materials
- Outstanding print density ensuring deep dark prints

### **Performance Characteristics**

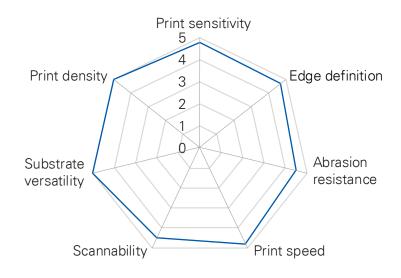

#### **Recommended Applications**





Food and Beverage

Health and Beauty



Inventory and Logistics





Pharma and Healthcare

Retail

### **Recommended Substrates**

| Paper          |                           |
|----------------|---------------------------|
| Vellum         |                           |
| Uncoated paper |                           |
| Coated paper   | $\bullet \bullet \bullet$ |

| Synthetics |  |
|------------|--|
| PP         |  |
| PE         |  |
| PET        |  |

DNP Imagingcomm Europe B.V Oudeweg 42, 2031CC Haarlem, the Netherlands T: +31 (0)23 553 30 60 E: sales@dnp.imgcomm.eu eu.dnpribbons.com

# DNP Technical Data Sheet

### TR4085plus<sup>®</sup> Resin-Enhanced Wax

### **Ribbon Properties**

| Description         | Result              | Test Method |  |
|---------------------|---------------------|-------------|--|
| Ink Type            | Wax (resin enhanced | )           |  |
| Colour              | Black               | Visual      |  |
| Total Thickness     | 8.0 ± 0.5 μm        | Weight      |  |
| Base Film Thickness | 4.8 ± 0.3 μm        | Weight      |  |
| Ink Thickness       | 3.2 ± 0.2 µm        | Weight      |  |

#### **Durability of Printed Image**

Print Speed: 6 IPS

| ) Densitometer   |
|--|
|  |
| Colorfastness Tester - 50 Cycles @ 500 Grams with Cotton Cloth                   |
| Colorfastness Tester - 20 Cycles @<br>200 Grams with Stainless Steel Pointed Tip |
|  |

\*American National Standard Institute (ANSI) Grade Levels A, B, C, D, and F, where A is excellent, B is above average, C is average, D is below average, and F is poor.

### **Compliance Certifications**





The information on this data sheet was obtained in DNP laboratories and is subject to change without notification. Please note that measured values may vary slightly when tested in a different environment.

DNP Imagingcomm Europe B.V Oudeweg 42, 2031CC Haarlem, the Netherlands T: +31 (0)23 553 30 60 E: sales@dnp.imgcomm.eu eu.dnpribbons.com