

MR-Q7-1000LE-EI(CE)

Latent Mobile Robot



Key Feature

- Self-localization navigation: adopts inertial, 2D barcode, laser and visual SLAM navigation methods to achieve accurate positioning.
- Supports smooth motions like forward, backward, and rotation via dual-wheel differential drive.
- Smart power management: supports multi-level electrical threshold, auto-charge, and self-returning after charging completed.
- Multi-safety protection includes front laser obstacle avoidance, side ultrasonic obstacle avoidance, pneumatic bumper strip detection, emergency stop button, etc.
- Human-machine interaction: indicates the device status via touch screen, sound and indicators.
- Supports carrying, rotating, lifting and lowering goods up to 1000 kg (2204.62 lb.).
- Wireless communication: supports Wi-Fi and seamless roaming in a network covered area.
- Complies with CE certification and ISO3691-4:2020 safety standard.

Typical Application

Automobile, consumer electronic, manufacturing, logistics, food, medicine, etc.

Available Model

MR-Q7-1000LE-EI(CE)

MR-Q7-1000CE-EI(CE)


MR-Q7-1000VE-EI(CE)

Accessory


Charging station model: MR-RA-CH-48/30B-CI(CE)



Appearance

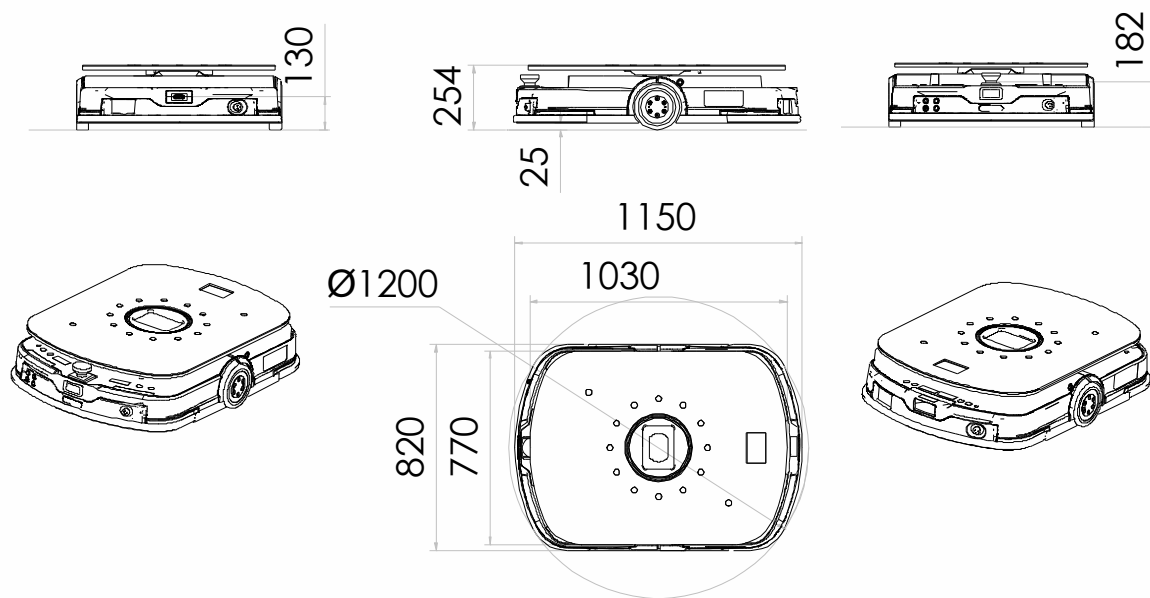

Charge Station Deployment



Specification

Model		MR-Q7-1000LE-EI(CE)	
Basic Parameter			
Dimension (L × W × H)		1150 mm × 820 mm × 254 mm (45.28" × 32.28" × 10.00")	
Rotation diameter		1200 mm (47.24")	
Chassis above the ground		25 mm (0.98")	
Lifting tray dimension		1030 mm × 770 mm (40.55" × 30.31")	
Lifting height		60 mm (2.36")	
Lifting type		Electrically lifting	
Weight		178 kg (392.42 lb.)	
Rated load		1000 kg (2204.62 lb.)	
Navigation mode		Laser SLAM/2D barcode/Visual SLAM(ground texture)	
Human-machine interaction		Touch screen	
Safety Protection			
Front	Laser Obstacle Avoidance	Installation Height	182 mm (7.17")
		Scanning Angle	260°
		Max. Detection Range	20 m (787.40")
Side	Ultrasonic Obstacle Avoidance	Sensor quantity	One each on left and right sides
		Installation height	188 mm (7.40")
		Opening angle	Horizontal 80°, vertical 34°
		Max. detection range	0.2 m to 1 m (7.87" to 39.37")
Bumper Strip Detection		Front/Rear	
Emergency Stop Button		Front/Rear	
Motion Performance			
Rated running speed (empty)		2 m/s	
Rated running speed (rated load)		1.8 m/s	
Rated acceleration (empty)		1 m/s ²	
Rated acceleration (rated load)		0.6 m/s ²	
Rotation speed (empty)		200°/s	
Rotation speed (rated load)		60°/s	
Gradeability		4°	
Location angle accuracy		± 1°	
Location accuracy		± 10 mm (± 0.39")	
Battery Performance			
Battery Type		LiFePO	
Rated Voltage		48 V	
Charge Cycle		1500 times (for fully charging and discharging)	
Run Time		8 h	
Charge Time		≤ 1.5 h (for fully charging and discharging)	

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.