

VKP60

60mm ultra-compact receipt/ticket kiosk printer



VKP60 compact

VKP60 paper mouth

Key points

Performance and compactness

ultra-compact solution capable of total and partial cut

Easy software integration

CUSTOM configuration utilities and SDK for all OS

Active anti-jam

reduces the need for technical service and allows a reliable receipt delivery

High versatility

the wide range of accessories make it a suitable for every application

Interface friendly

USB is default, serial and ethernet are available as optional

Paper Saving Mode

mode capable of reducing paper usage by 30% while maintaining the same amount of data



Markets

- Self-service kiosks
- Bank branches
- Gaming machines
- Parking systems
- Queue management systems
- Vending machines
- Gas stations
- Payment terminals

VKP60 is the kiosk printer for **receipts and tickets**, capable of adapting to a wide range of settings thanks to its **multiple configurations**. Compact, versatile, and packed with features such as **anti-jam, total and partial cut**, this device fits any type of kiosk with its roll holder adjustable in two positions. The product boasts self-installing Windows®, Linux, OPOS, Java POS, and Status Monitor SDK **drivers** and it supports PrinterSet, CPT, Windows® API, Driver Manager, Android™ API, and iOS API **software tools**. VKP60 is available in two different configurations: **compact and paper mouth**.


VKP60 - 60mm ultra-compact receipt/ticket kiosk printer

Features


	VKP60 - compact	VKP60 - paper mouth
Resolution	203 dpi	
Power supply	24V, 12V adapter (optional)	
Printing speed	up to 200 mm/s @24V	
Paper thickness	50 - 130 µm	
Roll diameter	max. 100 mm (with Custom roll holder)	
Paper width	44, 50, 54, 58, 60 mm	
Cutter	total and partial cut	
Interfaces	USB 2.0, Virtual Com, RS232 or ETH (optional)	
Sensors	Paper In, cover open, print-head over-temperature, black mark, anti-jam	
Character set	PC437, PC850, PC858, PC860, PC862, PC863, PC864, PC865, PC866, Katakana, WPC1250, WPC1251, WPC1252, WPC1253, WPC1254, WPC1255, WPC1256, WPC1257, WPC1258, Chinese GB18030, Korean PC949	
Supported barcodes	UPC-A - UPC-E - EAN13 - EAN8 - CODE39 - ITF - CODABAR - CODE93 - CODE128 - CODE32 QR code - Aztec - PDF417 - Datamatrix - GS1 Databar	
Print head life	150 km / 100M pulses	
Cutter life	1M	
LED paper mouth	No	Default
Drivers	Windows® (32/64 bit), CUPS Linux (32/64 bit), OPOS, Java POS, Status Monitor SDK	
SW tools	PrinterSet, CPT, Windows® API, Driver Manager, Android™ API, iOS API	
Operative temperature	-20 to +70°C ; 10 to 80% RH (no condensation)	
Dimensions	59.5 mm (L) x 86 mm (W) x 86.5 mm (H)	71.5 mm (L) x 86 mm (W) x 89.5 mm (H)
Weight	330 g	340 g



VKP60 compact
with roll holder and dongle ETH

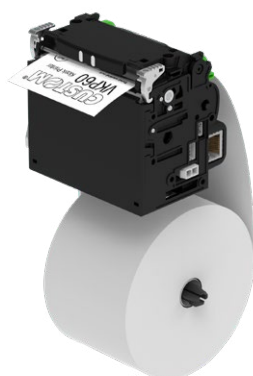

VKP60 paper mouth
with roll holder and dongle ETH

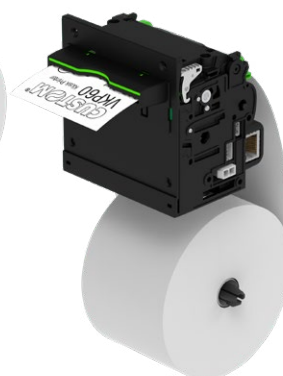

Available models

P/N	Description
915NA010100300	PRINTER VKP60 USB RS232 COMPACT
915NA020100300	PRINTER VKP60 USB RS232 PAPER MOUTH

Accessories

P/N	Description
976NA010000008	ROLL HOLDER BRACKET VKP60 WITH NPE
976NA010000003	VKP60 ADAPTER TO 12VDC
976NA010000006	DONGLE ETH VKP60
976NA010000007	DONGLE RS232 VKP60
976NA010000004	TG2460 BRACKET ADAPTER KIT
963GE020000071	POWER SUPPLY 24V 60W CONNECTOR DIN

Scan or click the QR CODE and find out more about **CUSTOM**

