


> AXR[®]TX

The specialty resin for printed care labels


AXR[®]TX has been specially designed to meet ARMOR's high-quality standards, offering optimum durability in line with the highly specific demands of textile product life cycles.

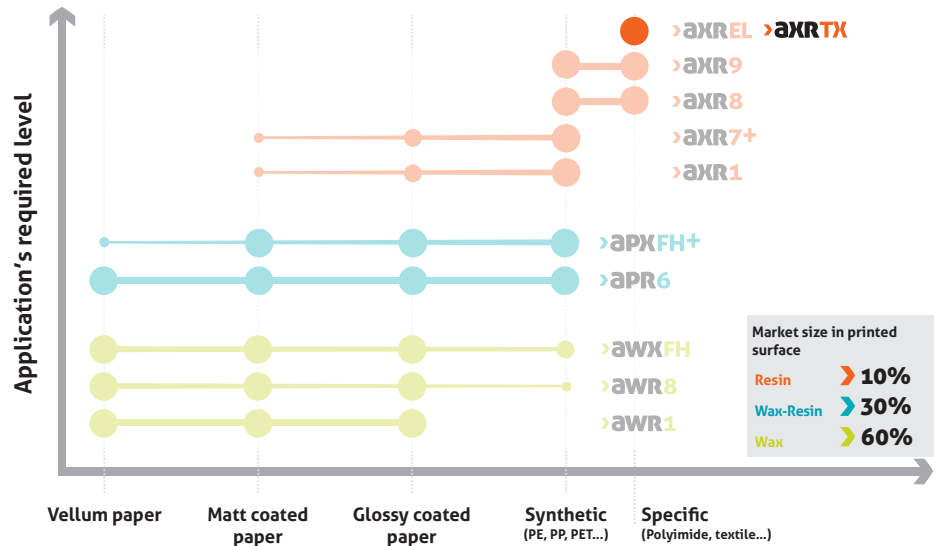


Printing receptor

synthetics	specific
PET ●●●	Nylon ●●●
	Satin ●●●

Print resistance

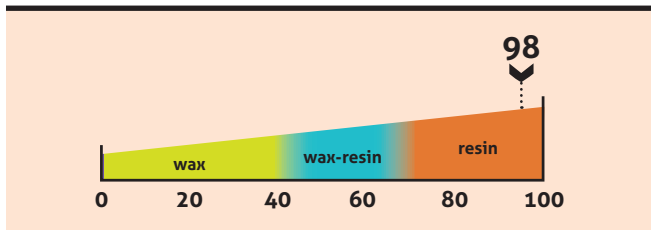

Energy

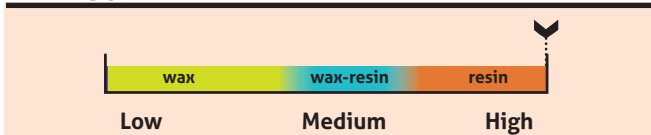

Compliant with the following regulations

OEKO-TEX [®] Standard 100 - Product class I
REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

product life cycle

Transportation



Traceability

Purchase/Sale



Identification

Cleaning



Instructions

Usage



Resistance

Your ribbon identity

Colours: ●

Length (m):

Width (mm):

Part number:

Your distributor:

Contact :

> axrTX

Application fields

Care labels



Product performance

print quality

90°Barcode	95	A _a Small characters	100	Logos	100
0°Barcode	90	2D Barcode	98	● Blackness	1,9 ODR*


*Optical Density by Reflection, measured using a densitometer.

technical resistances

Washing EN ISO 105-E01 : 2010 Colour fastness in water. EN ISO 6330/A1 : 2009 Domestic washing and drying procedures for textile testing.	Dry cleaning EN ISO 105-D01 : 2010 Colour fastness to dry cleaning using perchlorethylene solvent.	Other resistances: Stonewash Bleach Crease removal Ironing UV
Rubbing EN ISO 105-X12: 2003 Colour fastness to rubbing.	Sweat EN ISO 105-E04 : 2009 Colour fastness to sweat.	

Product physico-chemical features

product structure

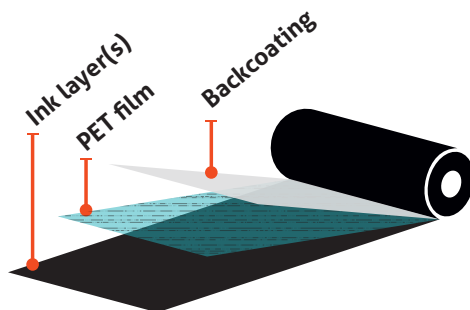

PET film	Thickness: 4 µm
Ink	Resin
Melting point	75°C/167°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.

The inkanto benefits



› **Warranty**
This product is guaranteed for life against any manufacturing defect in normal conditions of use and storage.



› **Quality commitment**
Easy to use with guaranteed product performance: the certificate of conformity for your product can be accessed via the flashcode on the box.



› **Easy to identify products:**
The inkanto rolls families are identified by color codes. The roll labels highlight the important information about the product.



› **Your product is delivered with a cleaning wipe**
To clean the print head and maintain the maximum performance of your printer.



› **Packing**
Consistent packaging units depending on the roll dimensions.

A certified and approved production site



Quality, health & safety and environmental systems:
ISO 9001
OHSAS 18001
ISO 14001
ISO 50001 (France only)



Responsible Care
The charter of the International Council of Chemical Associations for improvements in health & safety and the environment.



Global Compact
UN initiative inviting companies to apply fundamental ethical and environmental values.